



HD



H.264



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse





E-mail

Characteristics

- 32 CH TVI / CVI / AHD video input
- 32 CH 1080P / 1080P lite / 720P / WD1 recording
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneously playback
- Search: time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Android OS

Dimensions

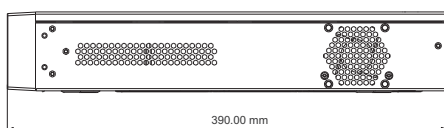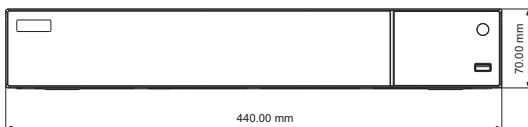

Specification

Model		DVR-AT2732TC
System	Compression	Standard H.264 High Profile
	CPU	Cortex A9
	OS	Embedded Linux
Video	Input	BNC × 32
	Resolution	TVI / CVI / AHD 1080P, 720P, WD1 real time
	Output	HDMI × 1 : 1920 × 1080, VGA × 1 : 1920 × 1080, BNC × 1 : CVBS (used as the main or spot output)
Audio	Input	RCA × 4
	Output	RCA × 1
Record	Two-way audio	Take up channel one audio input
	Resolution	1080P, 1080P lite, 720P, WD1
	Frame Rate	1080P : 12 fps (PAL) / 15 fps (NTSC) 1080P lite / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC)
	Bit Rate	768Kbps ~ 8Mbps
Play back	Mode	Manual, timer, motion, sensor
	Playback	16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Alarm	Function	Play, pause, FF, FB, digital zoom, etc.
	Mode	Manual, sensor, motion, exception
	Input	4
	Output	1
Network	Triggering	Record, snap, preset, e-mail, etc.
	Interface	RJ45 10M / 100M / 1000Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Mobile Device	Web Client	Multiple users online
	OS	iOS, Android
Storage	HDD	SATA × 4, max 6T per HDD
	Local Backup	U disk, USB removable HDD
Backup	Network Backup	Yes
	Port	RS485 × 1, connect to PTZ or keyboard
Port	USB	USB 2.0 × 1 (front panel), USB 3.0 × 1 (rear panel)
	Remote Controller	Optional
	Power Supply	ATX 250W
Others	Consumption	≤ 20W (without HDD)
	Dimensions (mm)	440 × 390 × 70 (W × D × H)
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity

Rear Panels

